



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

PCT IB/04/52197

REC'D 0:9 NOV 2004

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03104027.2

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Anmeldung Nr:
Application no.: 03104027.2
Demande no:

Anmeldetag:
Date of filing: 30.10.03
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.
Groenewoudseweg 1
5621 BA Eindhoven
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Pickup unit and disk drive unit provided with such pickup unit

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

G11B7/00

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PT RO SE SI SK TR LI

Pickup unit and disk drive unit provided with such pickup unit

FIELD OF THE INVENTION

The invention relates to a pick up unit for reading and/or writing data on a disk.

5 BACKGROUND OF THE INVENTION

A pickup unit of this type is known from patent application US 2002/0009032 A1.

US 2002/0009032 A1 discloses a pickup unit for recording and reproducing information with respect to an optical disk. The pickup unit comprises an objective lens
10 provided in a lens holder which is connected to a frame by two pairs of elastic support members. The elastic support members extend parallel to each other and substantially parallel to the surface of the disk. In order to focus the lens with respect to the disk, the lens holder is movable towards and from the disk in a focus direction of the lens by a deflection of the elastic support members powered by a driving coil and a magnet. The lens and the portion of
15 the frame closest to the surface of the disk both have about the same distance to the surface of the disk. As it is more and more desired to have a very small operating distance between the lens and the surface of the disk - smaller than the flatness tolerances of the disk, a risk of undesired collision between the pickup unit and the disk exists, in particular between the disk and the portion of the frame closest to the surface of the disk. Collision between the disk and
20 the pickup unit may lead to serious damage of the surface of the disk.

In an attempt to solve this problem, a pickup unit known in the art comprises a lens holder having a lens mounted thereto by means of a pedestal. In this manner, the lens extends on an elevated position with respect to the frame of the pickup unit. As a result the lens can be positioned at a distance with respect to the surface of the disk which is smaller
25 than the flatness tolerances of the disk, without the risk of collision between the disk and the portion of the frame closest to the surface of the disk. However, by mounting the relatively heavy lens on the pedestal, the centre of mass of the lens holder raises with respect to the centre of stiffness of the elastic support members accordingly. This leads to unfavourable dynamical properties of the lens holder which must be compensated by a counter weight

mounted to the lens holder on the opposite side with respect to the pedestal. Due to the additional mass of the pedestal and the counterweight however, the movement of the lens holder needs to be powered by more powerful driving coils and magnets.

5 SUMMARY OF THE INVENTION

It is an object of the invention to provide an improved pickup unit for reading and/or writing data on a disk.

In order to accomplish that objective, the pickup unit according to the invention comprises a lens in a lens holder which is connected to a frame of the pickup unit
10 by at least one elastic supporting member extending between a mounting position at the lens holder and a mounting position at the frame, the lens holder being movable with respect to the frame in a focussing direction of the lens towards and away from the disk by bending the at least one elastic support member under the action of an actuator acting between the lens holder and the frame, wherein at least in an inactivated state of the actuator the mounting
15 position of the at least one elastic supporting member at the lens holder is positioned closer to the disk than the respective mounting position of the at least one elastic supporting member at the frame, as seen in the focus direction of the lens.

In the pickup unit according to the invention, it is possible to position the lens closer to the disk than the frame of the pickup unit without the need to use a counterweight.
20 This is a result of the fact that in the invention not only the centre of mass of the lens holder is raised but also the centre of stiffness of the at least one elastic supporting member. Consequently it is not necessary to lower the centre of mass of the lens holder again to coincide with the centre of stiffness.

Due to the features as defined in claim 2 the desired effect can be obtained by
25 a simple substantially rectilinear supporting member.

Other embodiments of the pickup unit according to the invention are described in the claims 3 to 8.

The invention also relates to a disk drive unit comprising a disk drive and the pickup unit according to the invention.

30 Aspects and advantages of the invention will be apparent from the following description with reference to the drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a perspective top view of a portion of a disk drive unit provided with a preferred embodiment of the pickup unit according to the invention;

Fig. 2 is a side view of the pickup unit shown in Fig. 1, with some parts
5 removed for clarity.

DESCRIPTION OF THE PREFERRED EMBODIMENT

The drawings show a preferred embodiment of the pickup unit according to the invention. This pickup unit 1 may be used in a device for reading and/or writing data on a disk, such as a compact disk player, which is adapted to read/and or write compact disks for
10 audio and/or video by means of an optical or magnetical reading and/or writing member.

In a disk 2 for use in the previously described disk drive unit, data is encoded in one or more layers of the disk 2, shown schematically in Fig. 1. Various principles are known, each variant being suitable for use in conjunction with the invention. The data is laid
15 down in one or more data tracks 3 in digital form. The variations of (optical) properties along the data tracks contains the data recorded on the disk 2. To read and/or write the data on the disk 2, it is rotated by means of a disk drive in the form of a motor 4. The disk 2 is read and/or written by detection of the variations of (optical) properties along the data tracks 3 by the pickup unit 1. In the embodiment shown in Fig. 1 the variations are detected by means of
20 laser light emitted from and reflected back to the pickup unit 1.

With reference to Fig. 1, the preferred embodiment of the pickup unit 1 comprises a lens 5 mounted to a lens holder 6. The lens holder 6 is connected to a frame 7 of the pickup unit 1 by means of four rectilinear wire members 8 (only three are visible in Fig. 1) which are made of a resilient, preferably electrically conductive material, such as copper,
25 iron or an alloy. In this manner the wire members 8 form elastic supporting members for suspending the lens holder 6 in a steady (prebiased) position when no external force is exerted on the lens holder 6, and allowing the lens holder 6 to be slightly moved with respect to the frame 7 when a force is applied to the lens holder 6. The wire members 8 are mounted to the lens holder 6 and the frame 7 at mounting positions 9, 10 at the lens holder 6 and at the
30 frame 7 respectively.

The pickup unit 1 as a whole is movable in a tracking direction y with respect to the disk 2 by means of a sledge mechanism (not shown). Under the action of an actuator 11, 12, 13 provided between the lens holder 6 and the frame 7, the lens 5 of the pickup unit 1

is movable with respect to the disk 2 and the frame 7 in the tracking direction y and a focussing direction z, and tiltable about a tangential direction x.

In the preferred embodiment of the pickup unit 1, the actuator 11, 12, 13 comprises a plurality of permanent magnets 11 connected to the frame 7 and a plurality of coils 12, 13 provided at the lens holder 6 and the permanent magnets 11 respectively, wherein the coils 12, 13 and the permanent magnets 11 exert forces to the lens holder 6 by means of electric currents through the coils 12, 13. The movement of the lens holder 6 with respect to the frame 7 and the disk 2 is used to focus the laser light to the exact point on the data track 3 in the disk 2, and to position the lens holder 6 in such a way with respect to the disk 2 that the laser light is always locally perpendicular to the surface of the disk 2, despite an inclination of the surface of the disk 2 caused by deviations in the flatness of the surface of the disk 2.

To accurately control the position and orientation of the lens holder 6 of the preferred embodiment of the pickup unit 1, the electric currents through the coils 12, 13 are provided by a control circuit (not shown). In order to determine the actual position of the lens holder 6 with respect to the disk 2, the control circuit may for example use intensity parameters of the laser light received by the pickup unit 1. The control unit is not considered part of the invention and a multitude of possible implementations of a control circuit for this purpose are known, so that no further description is given of the control unit.

With reference to Figure 1, the wire members 8 are provided in two cooperating pairs 14, 15, wherein the cooperating pairs 14, 15 are positioned at a distance from each other, symmetrically with respect to a virtual plane extending through the centre of the lens 5 in the focussing direction z and the tangential direction x. In each cooperating pair 14, 15 of wire members 8 their mounting positions 9 at the lens holder 6 are symmetrically spaced apart in the focussing direction z of the lens 5 with respect to the centre of mass of the lens holder 6 for reasons explained in more detail further on in this description. The mounting positions 10 of each cooperating pair of wire members 8 at the frame 7 are spaced apart in the same direction and over the same distance as their respective mounting positions 9 at the lens holder 6. The wire members 8 are mounted such that, in an inactivated state of the actuator 11, 12, 13, the mounting position 9 of each wire member 8 at the lens holder 6 is positioned closer to the disk 2 than the respective mounting position 10 of the wire member 8 at the frame 7, as seen in the focussing direction z of the lens 5. As a result, the wire members 8 have an inclined position with respect to the plane through the disk 2.

With reference to Figure 2, the position of the pickup unit 1 with respect to the disk 2 is shown in a side view of the pickup unit 1. In the drawing, arrow A indicates a possible reach of the disk 2 due to its flatness tolerances, arrow B indicates an operating distance of the lens with respect to the disk 2 and arrow C indicates a required clearance between the frame 7 and the possible reach of the disk 2. For clarity reasons the possible reach of the disk 2 is also indicated by two horizontal dashed lines. As can be seen in the drawing, the lens holder 6 carrying the lens 5 is adapted to be positioned at a very small operating distance with respect to the surface of the disk 2, typically 150 μm to 1 mm, while the whole frame 7 of the pickup unit 1 remains out of reach of the rotating disk 2 due to the clearance indicated with arrow C that remains between the frame 7 and the possible reach of the rotating disk 2. This clearance may typically be between 1 to 5 mm. It will therefore be understood that collisions between the rotating disk 2 and the frame 7 of the pickup unit 1 are avoided due to the raised position of the lens holder 6 with respect to the frame 7, while the lens 5 operates at a very short operating distance B with respect to the disk 2.

With reference to Fig. 1, the four wire members 8 of the pickup unit 1 are formed such that they all have the same length and the same bending stiffness. As a first result rotations of the lens holder 6 about the focussing direction z and the tracking direction y are avoided when a translating force is exerted to the lens holder 6 in the tracking direction y and the focussing direction z, respectively. As a second result the centre of stiffness of the wire members 8 with respect to the translating movement in the tracking direction y and the focussing direction z of the lens holder 6 is located in the common middle of the four mounting positions 9 of the wire members 8 at the lens holder 6. That is, a force exerted to the lens holder 6 at the centre of stiffness of the wire members 8 in the focussing direction z or the tracking direction y does not lead to rotations of the lens holder 6 about the tangential direction x. Moreover, the centre of stiffness of the wire members 8 is for any steady (prebiased) position of the lens holder 6 located in the common middle of the mounting positions 9 of the wire members 8 at the lens holder 6. In other words, if the steady (prebiased) position of the lens holder 6 is moved, the centre of stiffness of the wire members 8 is moved accordingly. The lens holder 6 including the lens 5 is dimensioned such that its centre of mass coincides with the centre of stiffness of the wire members 8. This is why in this embodiment for each cooperating pair 14, 15 the mounting positions 9 of the wire members 8 at the lens holder 6 are symmetrically spaced apart in the focussing direction z of the lens with respect to the centre of mass of the lens holder 6. Due to the coinciding centre of mass and centre of stiffness, translations of the lens holder 6 in the tracking direction y and

the focussing direction z do not lead to unfavourable rotations about the focussing direction z and the tracking direction y respectively due to mass inertia forces, which rotations may typically occur at translating frequencies higher than the natural frequency of the suspended lens holder 6. As for dynamic reasons the prior art lens holders are generally already
5 designed such that their centre of mass is located at the common middle of the four mounting positions of the wire members, a prior art lens holder may advantageously be used in the pickup unit 1 according to the invention.

With reference to Fig. 1, the coils 12, 13 and magnets 11 of the actuator 11, 12, 13 are provided in a symmetrical manner in the tangential direction x on both opposite
10 sides of the lens holder 6, wherein the opposite sets of coils 12 for powering the translating movement in the focussing direction z and the opposite coils 13 for powering the translating movement in the tracking direction y and the rotation about the tangential direction x are powered symmetrically by the control unit. As a result, the translating forces and the rotating
15 torques exerted on the lens holder 6 act in fact in the middle of each set of coils 12, 13 and magnets 11, whereby this middle forms a force centre of the actuator 11, 12, 13. In the preferred embodiment, the coils 12, 13 and magnets 11 of the actuator 11, 12, 13 are positioned such, that the force centre of the actuator coincides with the centre of stiffness of the wire members 8 and the centre of mass of the lens holder 6. As a result, unfavourable
20 rotations of the lens holder 6 about the tracking direction y and the tangential direction x are avoided when forces in a translating direction are exerted to the lens holder by the actuator 11, 12, 13 at frequencies both higher and lower than the natural frequency of the suspended lens holder 6, which is also the case at the prior art pick up unit.

From the foregoing description it should be understood that the pickup unit 1 according to the invention comprises a lens 5 which is positioned closer to the disk 2 than its
25 frame 7 in the focussing direction z of the lens, wherein both the centre of stiffness of the wire members 8 and the centre of mass of the lens holder 6 are positioned closer to the disk 2 over the same distance. As a result, a compensation of the position of the centre of mass of the lens holder 6 to avoid unfavourable dynamical properties, for example by means of a counterweight at the lens holder as known in the art, is not necessary. Accordingly more
30 powerful driving coils and magnets for moving such compensated (heavier) lens holder are not necessary.

The invention is not restricted to the above-described embodiment as shown in the drawings, which can be varied in several ways without departing from the scope of the invention.

For example, the elastic support members may have any kind of shape between their mounting positions, and they may each have a different bending stiffness, as long as the centre of stiffness of the wire members coincides with the centre of mass of the lens holder. Accordingly the number of elastic supporting members is not limited to four, 5 whereby the pickup unit may for example also be provided with six elastic supporting members arranged in two cooperating groups of supporting members instead of two cooperating pairs of supporting members.

As a further example, the mounting positions of the elastic support members of each cooperating pair at the lens holder and the frame may be spaced apart over an equal 10 distance and in the same direction in any direction to obtain the (dynamic) properties of the movement of the lens holder as stated before.

In another variation, the elastic supporting members may extend at a slightly angle with respect to a virtual plane through the lens in the focussing direction and the tangential direction.

15 Moreover, several combinations of the features defined in the claims are possible.

In general it is noted that, in this application, the expression "comprising" does not exclude other elements, and "a" or "an" does not exclude a plurality. A single processor or unit may fulfil the functions of several elements in the appended claims. Reference signs 20 in the claims shall not be construed as limiting the scope thereof.

CLAIMS:

1. Pickup unit (1) for reading and/or writing data on a disk (2), comprising a lens (5) in a lens holder (6) which is connected to a frame (7) of the pickup unit (1) by at least one elastic supporting member (8) extending between a mounting position (9) at the lens holder (6) and a mounting position (10) at the frame (7), the lens holder (6) being movable with respect to the frame (7) in a focussing direction (z) of the lens (5) towards and away from the disk (2) by bending the at least one elastic support member (8) under the action of an actuator (11, 12, 13) acting between the lens holder (6) and the frame (7), wherein at least in an inactivated state of the actuator (11, 12, 13) the mounting position (9) of the at least one elastic supporting member (8) at the lens holder (6) is positioned closer to the disk (2) than the respective mounting position (10) of the at least one elastic supporting member (8) at the frame, as seen in the focus direction (z) of the lens (5).
2. Pickup unit (1) according to claim 1, wherein the at least one elastic supporting member (8) is substantially rectilinear and has an inclined position with respect to the plane of the disk (2).
3. Pickup unit (1) according to claim 1 or 2, comprising a plurality of elastic supporting members (8), preferably four or six elastic supporting members (8).
4. Pickup unit (1) according to claim 3, wherein each elastic supporting member (8) forms a part of a cooperating group (14, 15) of elastic supporting members, and wherein the mounting positions (9, 10) of the elastic supporting members within the cooperating groups (14 or 15) are spaced apart in the same direction and over an equal distance at the lens holder (6) and at the frame (7).
5. Pickup unit (1) according to claim 3 or 4, wherein for each cooperating group (14, 15) of elastic supporting members (8) their mounting positions (9) at the lens holder (6) are symmetrically spaced apart with respect to the centre of mass of the lens holder (6) in the focussing direction (z) of the lens (5).

6. Pickup unit (1) according to any one of claims 3 to 5, wherein each elastic supporting member (8) forms a part of a cooperating group (14, 15) of elastic supporting members (8), and wherein the two cooperating groups (14, 15) of elastic supporting members (8) are positioned at a distance from each other, symmetrically with respect to a virtual plane extending through the centre of the lens (5) in the focussing direction (z) and a tangential direction (x) of the lens (5) with respect to the disk (2).
7. Pickup unit (1) according to any one of claim 3 to 6, wherein the elastic support members (8) are wire members.
8. Pickup unit (1) according to any one of the preceding claims, wherein the at least one elastic supporting member (8) is made of an electrically conducting material.
9. Disk drive unit comprising a disk drive and the pickup unit (1) according to any one of the preceding claims.

ABSTRACT:

The invention relates to a pickup unit (1) for reading and/or writing data on a disk (2). The pickup unit (1) comprises a lens (5) in a lens holder (6) which is connected to a frame (7) of the pickup unit (1) by a plurality of elastic supporting members (8). The lens holder (6) is movable with respect to the disk (2) by bending the elastic supporting members (8). The mounting position (9) of each elastic supporting member (8) at the lens holder (6) is positioned closer to the disk (2) than the respective mounting position (10) of the elastic supporting member (8) at the frame (7), as seen in the focus direction of the lens (5). In this manner the lens holder (6) with the lens (5) is adapted to be brought to an operating distance with respect to the disk (2) which is smaller than the flatness tolerances of the disk (2), without the risk of collision between the frame (7) and the rotating disk (2).

(Fig. 1)

1/2

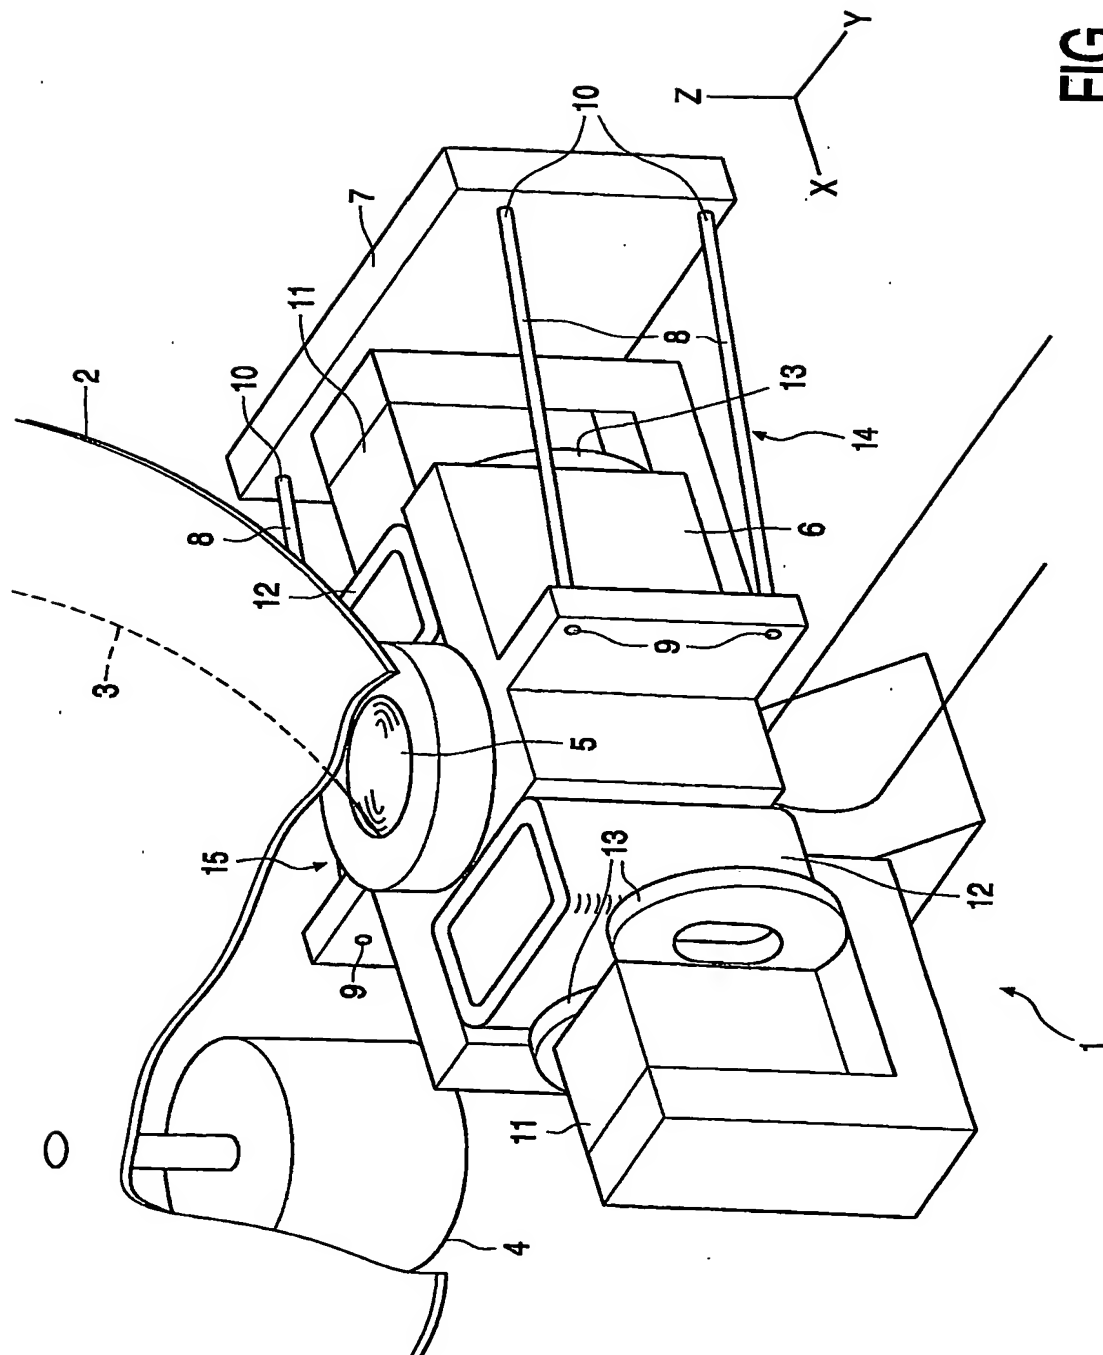


FIG. 1

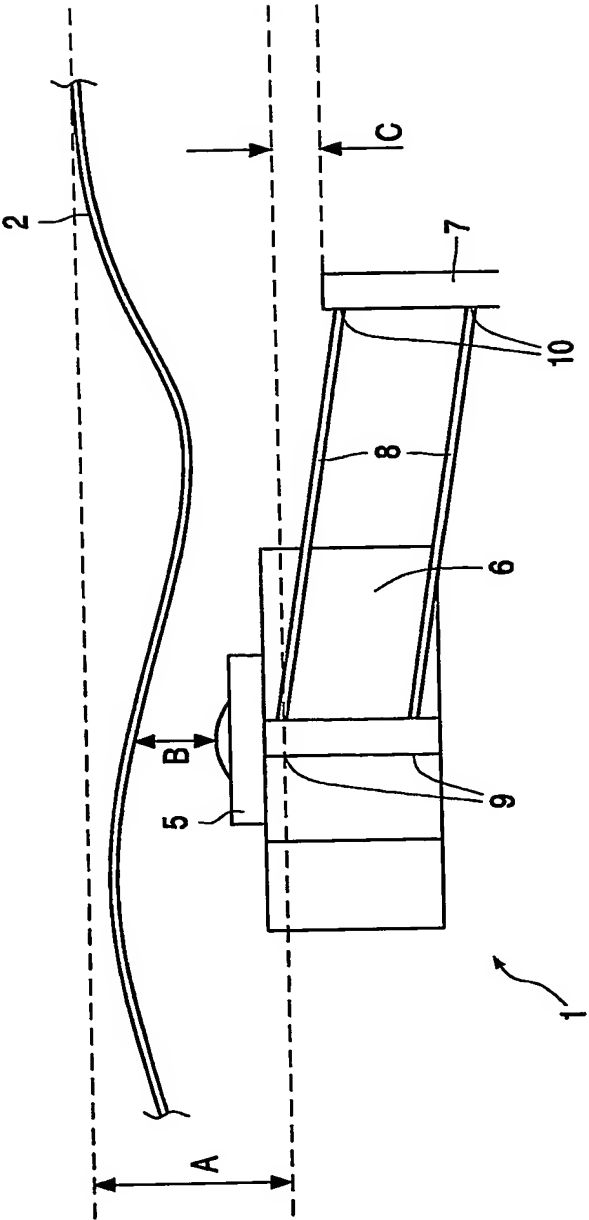


FIG. 2